


FXLED-SEL-120-24 specification



PRODUCT FEATURES:

- Material and technology : high lm 335 SMD and flexible FPC
- Lighting character : view angle,color uniform
- Lumen depreciation : good dissipation,no more than 3% after 30000h
- Electrical safety : use 24v power supply, safety and reliable
- Installation : 3M tape back of strip,ultrathin design




dimension diagram (unit:mm)

PRODUCT PARAMETER :

- Power: 9.6W/M
- Input voltage : DC24V
- Waterproof rate : IP33/IP55/IP65/IP67
- Size : 5000MM*8MM
- LM: 600 LM/M
- Led quantity/M : 120 led/m
- Led quantity/unit : 6 led/unit
- Color for choice : R/ G/ B/ Y/ W
- View angle: 120°


POWER SUPPLY INSTALLATION INSTRUCTION:

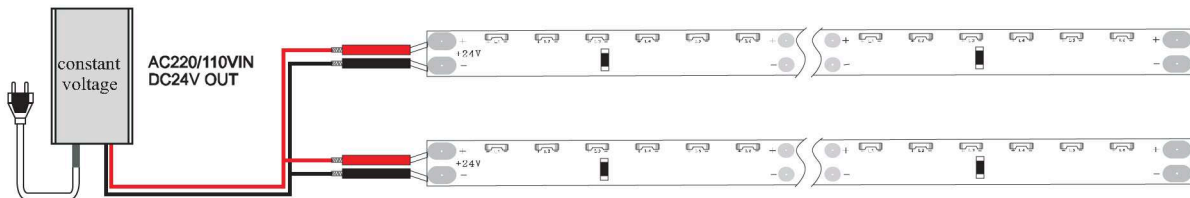

- Power supply: 24v constant voltage
- Power supply match: suggest 5m with one power supply
- power supply connection : attention the positive and negative ,don't polarity reversed
- Strip cutting: 6 led/unit,any length cutting for the unit

PRODUCT MODEL:

color	working voltage	working current	power	view angle	led quantity/M	size(mm)	package	waterproof for choice
	DC 24V	0.4A/M	9.6W/M	120°	120	5000X8	5M/roll	Glue covering Silicone tube Gel filling

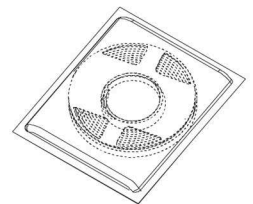

5m/roll with antistatic bag