

# Flexylight 120s

## LIGHT STRIP SERIES

### PRODUCT NOTES:

The FLEXYLIGHT 120s strip LED light is suggested to achieve a soft and diffused light, added to general lighting to underline architectural details: strip can be used in any ambience to underline architectural details or add value to spaces as stairs or hallways; or integrated into furnitures. Perfect for indoor setting it is also suitable for outdoor applications only if protected in a sealed cover version

### LIGHTING SOURCE

Source type	LED 3528
LED emitted flux	>710lm
Beam angle	120°
C.C.T.	3000 K 4000 K 6000 K
C.R.I.	>80
Wattage	9,6W/m
Lifetime L70	30000 h

### ELECTRICAL

Driver mounting	Remote
Forward voltage	24 Vdc
Brightness	>6 lm/LED
LED quantity	120/m

### PHYSICAL

Min. bend diameter	30mm
FPC Flexible can cut	50mm
Strip led lenght	5000mm


# LUPPICHINI

DESIGN LIGHTING




### BEAM ANGLE

120° Wide beam Luminaire emitted flux: >710lm/m Efficacy: >74 lm/w

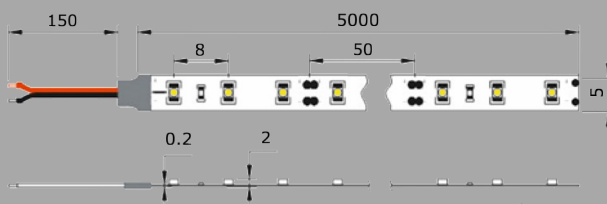

### ELECTRICAL DIAGRAM:

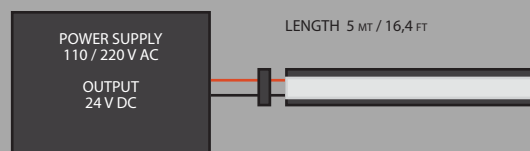

### Model Specifics:

Model Code:		Lumen 1m:	Watt 1m:	CRI:
5FLEXY12024V3000K	(3000 Kelvin)	710	9.6	>80
5FLEXY12024V4000K	(4000 Kelvin)	770	9.6	>80
5FLEXY12024V6000K	(6000 Kelvin)	820	9.6	>80