

# Flexylight 60

## LIGHT STRIP SERIES

### PRODUCT NOTES:

The FLEXYLIGHT 60 strip LED light is suggested to achieve a soft and diffused light, added to general lighting to underline architectural details: strip can be used in any ambience to underline architectural details or add value to spaces as stairs or hallways; or integrated into furnitures. Perfect for indoor setting it is also suitable for outdoor applications only if protected in a sealed cover version

### LIGHTING SOURCE

Source type	LED 3528
LED emitted flux	>355lm
Beam angle	120°
C.C.T.	3000 K 4000 K 6000 K
C.R.I.	>80
Wattage	4,8W/m
Lifetime L70	30000 h

### ELECTRICAL

Driver mounting	Remote
Forward voltage	24 Vdc
Brightness	>6 lm/LED
LED quantity	60/m

### PHYSICAL

Min. bend diameter	30mm
FPC Flexible can cut	100mm
Strip led lenght	5000mm


# LUPPICHINI

DESIGN LIGHTING




### BEAM ANGLE

120° Wide beam Luminaire emitted flux: >355lm/m Efficacy: >74 lm/w

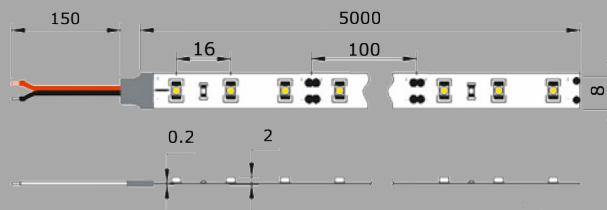

### ELECTRICAL DIAGRAM:

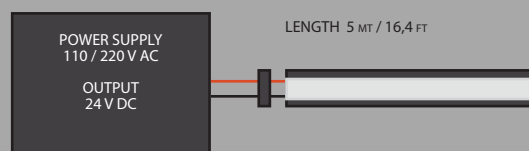

### Model Specifics:

Model Code:		Lumen 1m:	Watt 1m:	CRI:
8FLEXY6024V3000K	(3000 Kelvin)	355	4,8	>80
8FLEXY6024V4000K	(4000 Kelvin)	385	4,8	>80
8FLEXY6024V6000K	(6000 Kelvin)	410	4,8	>80